



Hinged Unit HU - SL

Panel Opening Orientation

- Fixed slim-Line Frame with self-contained Hinging Casement
- Composition Timber, Aluminium & Glass
- Hinges Left (LH) / Hinges Right (RH)
- Butt Hinges 180o opening
- Casement cannot be removed
- Single Slim Fit Handle



Closed



Part O pen



Slim-Fit Handle

Technical Information

Panel Configuration

Hinged Panel, self-contained within a fixed outer frame, opening inward. Hinges can be selected to the left or right side. Butt Hinges for 180° opening capability. Single slim-fit operating handle locking feature and compression seals.

Panels removable

No, orientation, i.e. LH Lefthand or RH Righthand must be selected at point of order, not retro adjustable.

Unit Build Size

Min 270mm x 525mm

Max. 4mm glass 1400mm x 1800mm, 6mm to 6.8mm glass 1400mm x 2500mm

Ultra-Panel glass 8.8mm to 10.8mm glass Max 1500mm x 3000mm (note weight management)

Maximum Panel weight 100kgs

Glass

Standard glass 4mm toughened – Standard frame maximum glass thickness 6.8mm

Ultra-Panel glass thickness: 8.8mm to 10.8mm

Thermal Performance: Variable

Standard 2.7 W/mK / *Low-E 1.8 W/mK

Acoustic Performance: Variable

Mid-Range Spec* 48dB / High spec 54dB

Specification

- Aluminium 6063-T6 alloy BS EN 755-9 standard, power coated to BS 6496 to 60 - 80-micron finish
- Stock finish: White – RAL 9003 Satin.
- Finishing Trim included: 20mm White PVC-U single bullnose trim as standard. Painted PEFC timber available with colour units or upon request.
- The Sub-Frame Primed high quality 2-coats, FSC Mix credit radiata pine clear grade, FSC mix credit TT-COC-002 157.
- Standard Sub-Frame sizes 25mm x 16mm & 43 mm 16 mm.
- All Frames are factory glazed.
- Standard gasket colour is white.

In line with our company policy of continuous product development and improvement Clearview reserves the right to make minor alterations without notice.

Optional Extras


- Black Gasket
- Panel Lock
- Casement opening restrictor
- Multi-unit coupling section for stacking connecting.
- Trickle vents / acoustic trickle vents
- RAL colour options
- Wider finishing trim options
- Timber bevelling for splayed reveals and bay formation. – *see options below*
- Timber sizes other than standard

Frame Details


Standard
Sub-Frame
25 x 16mm




XL
Sub-Frame
43 x 16mm

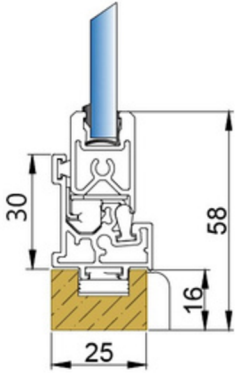


Standard Frame

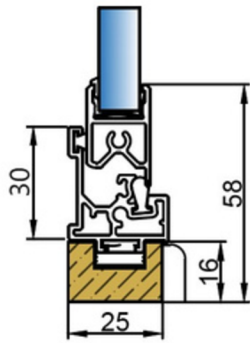

Standard Frame
Ultra-Panel



XL Frame

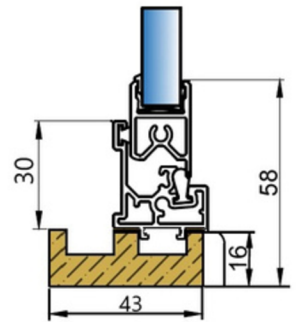

XL Frame
Ultra-Panel

Fixing Options

Face Fixing:
Pre-drilled
Front-to-Back



Reveal Fixing:
Track Drilled on
site by installer.




Reveal Fixing:
Pre-drilled
through XL timber




Images are for representation purposes only and may differ from some product options.


HU - SL Standard Frame Diagram

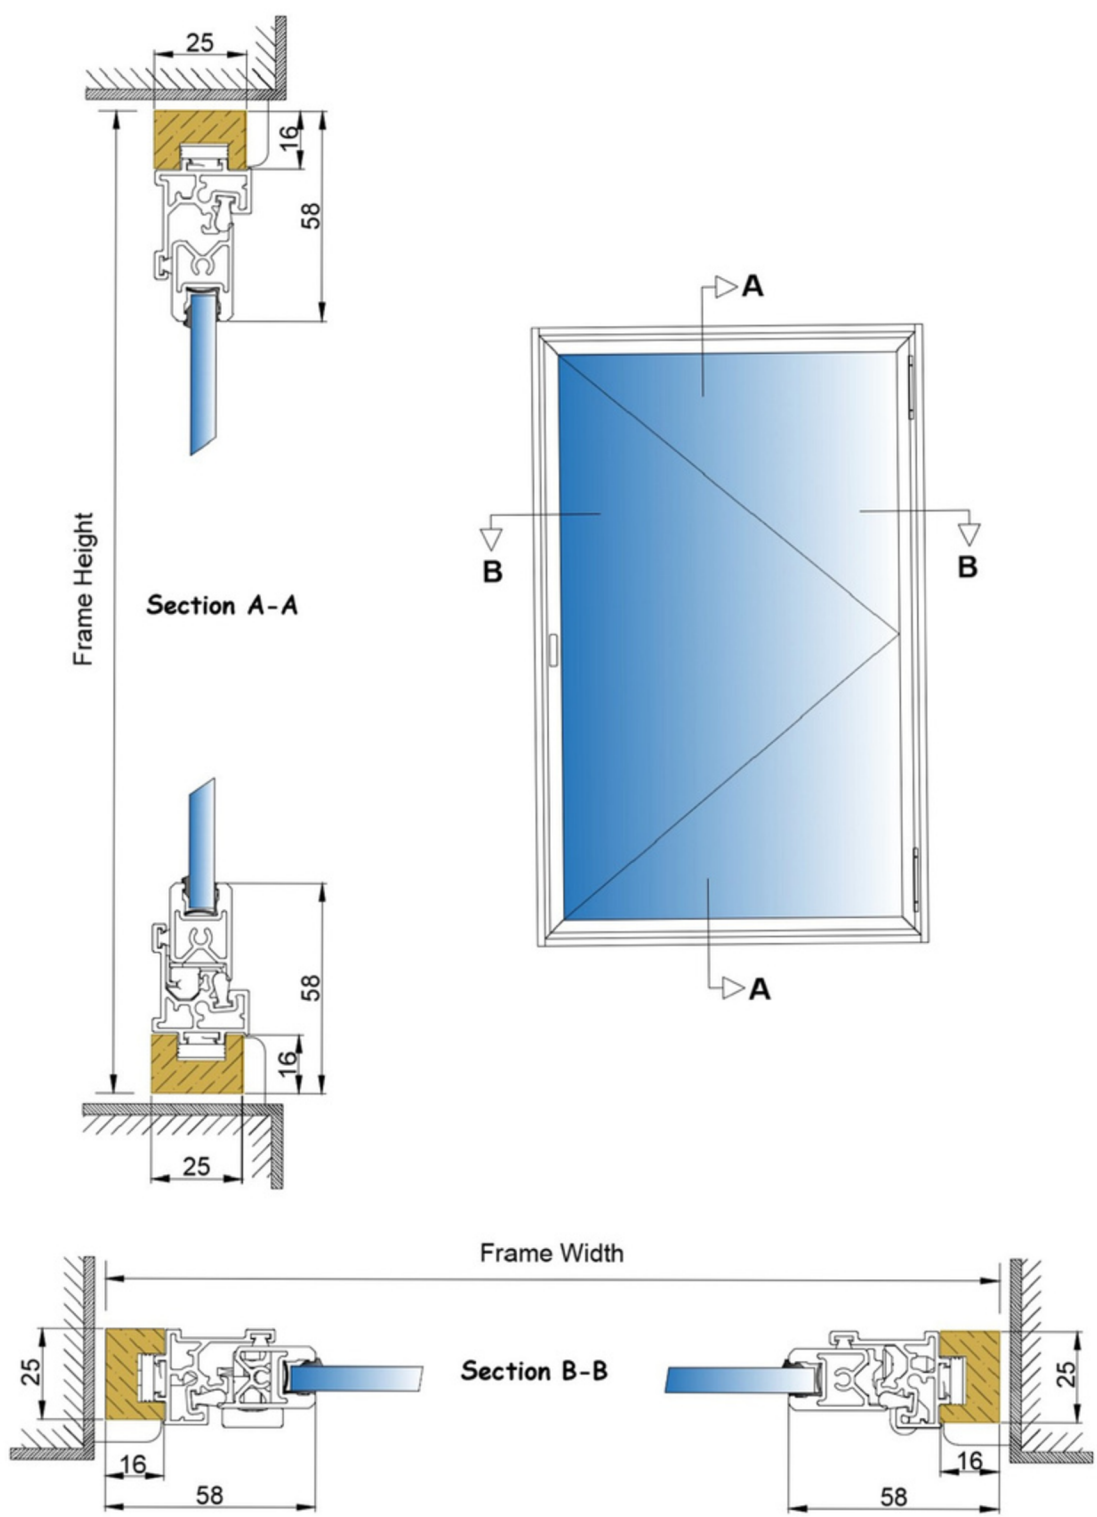


HU-SL XL Frame Diagram

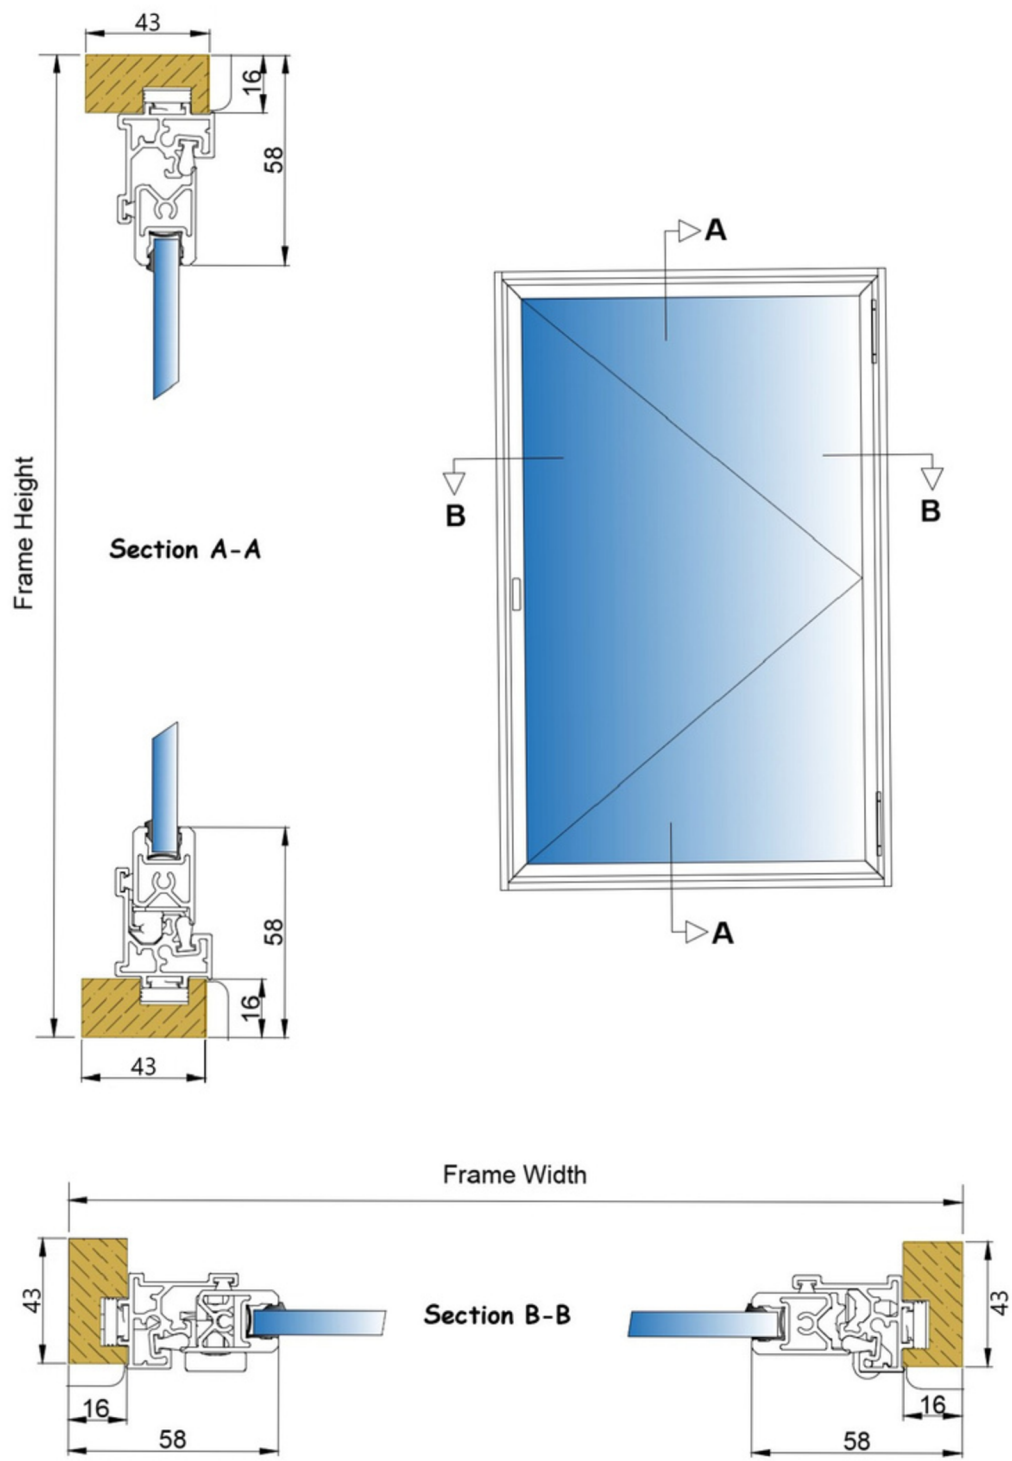

HU - SL Ultra Profile Diagram

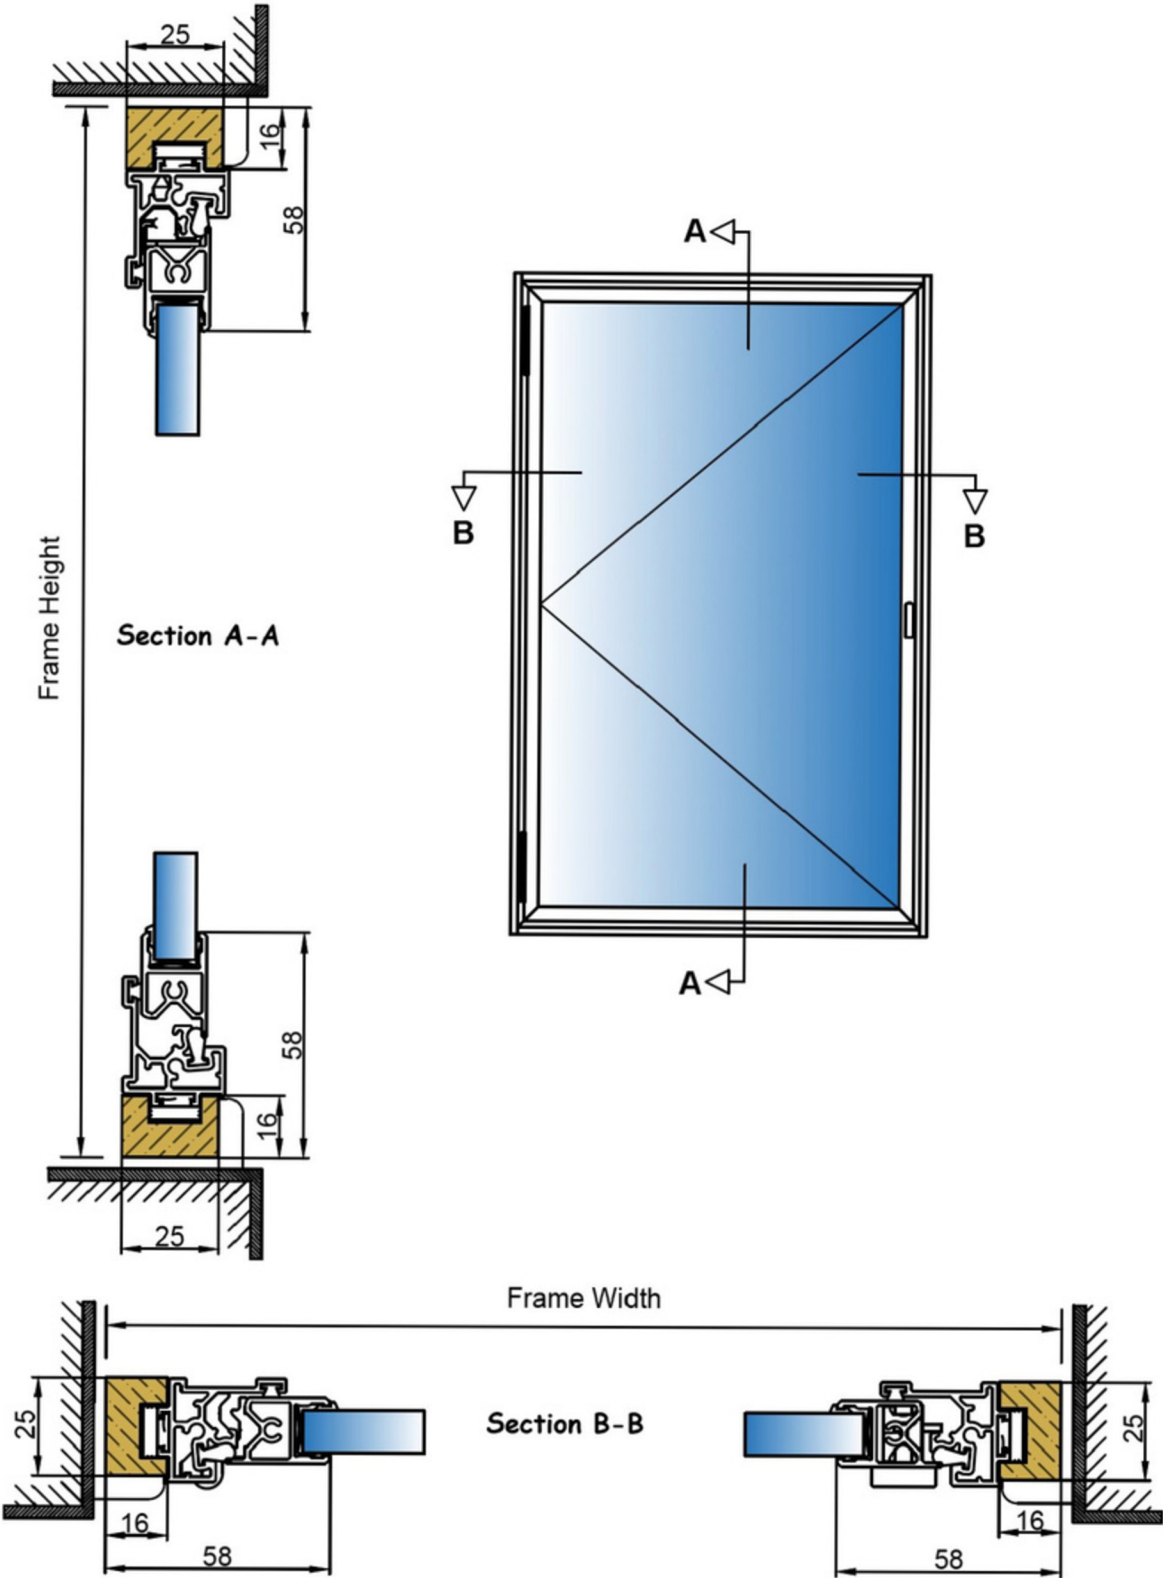

HU - SL Ultra XL Profile Diagram

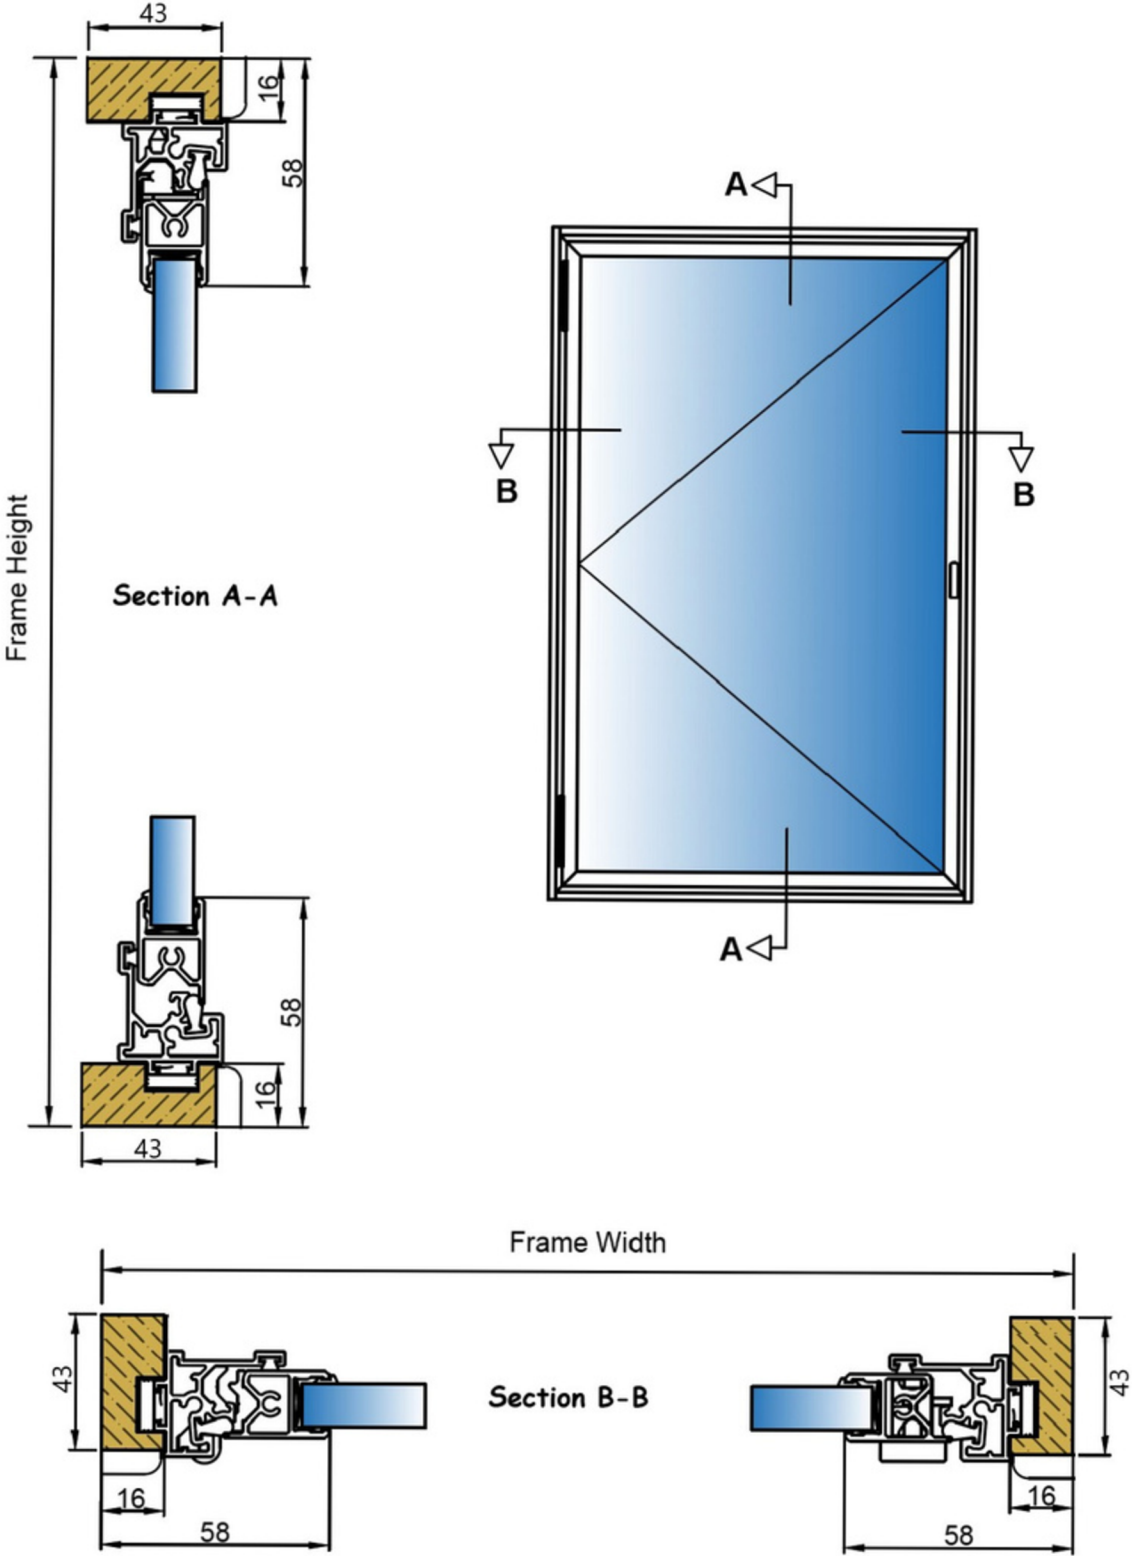

Timber Modification Options



Standard Timber Option



XL Timber Option




Bevelled Timber for Splayed Reveal



Example of Splayed Reveal



Angled Bay Bevelled Timber

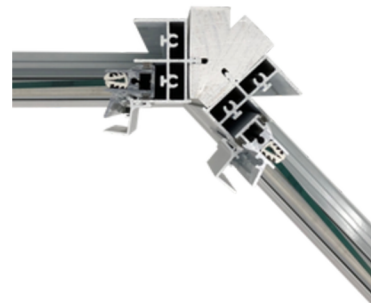

Angled Bay Connected Timbers




Square Bay Bevelled Timber




Square Bay Connected Timbers

Frame Shape Options



Standard Arch



Gothic Arch

Templates are required from the customer



SECONDARY GLAZING COMPANY

Please get in touch with one of our friendly team today for help & advice.



Online Help Centre

[Visit our Online Help Centre >>](#)



Fast Quote

[Get a fast quote online >>](#)



Email

info@secondaryglazingcompany.com



Phone

0333 577 0992



Address

53 Middlewood Rd, Hillsborough, Sheffield S6 4GW